



HIDDEN FASTENER STEEL ROOF PANELS

HIGH-END ROOFING PANELS FOR COMMERCIAL AND RESIDENTIAL BUILDINGS



TOP-OF-THE-LINE ROOFING

Designed as a roofing panel for prestige, commercial and residential buildings, IDEAL ROOFING's HERITAGE™ **SERIES** steel roof panels bring back the rich traditional style and appearance of standing seam roofs.

- Easy installation: no clips and no seamer necessary
- Save time and labour costs
- Allow for natural movement of roofing system

20¼" (514 MM) OR 16" (406 MM)


< → 17/16" 37 MM)

Stiffener ribs can be removed when specified.

The architecturally pleasing hidden fastener panel can be installed over a solid backing, or over steel or wood purlins through oval slots with **IDEAL ROOFING**'s specially designed fastening screws, allowing for the panel to slide during contraction or expansion.

This product is fabricated with a state-of-the-art roll former and is offered in **IDEAL ROOFING**'s Galvalume AZ150. It is available in our proven top-of-the-line 28, 26 and 24 gauge steel. Combined with the advanced 10,000 Series paint system with Kynar 500[®] resin, this product is available in your choice of 14 attractive colours.

THE HERITAGE™ SERIES offers you the best steel panel product ever made to protect your roof while beautifying and adding true value to your prestige commercial and residential buildings.



HIDDEN FASTENER PANEL

CANADIAN PATENT: # 1259466 USA PATENT: # 4926608

THE HERITAGE[™] SERIES STEEL PANELS are offered in standard widths of 20¼" or 16" to suit and adapt to any style of sloped roof and to enhance any building architecture.



STRUCTURAL PROPERTIES

	TOTAL NOMINAL	CORE NOMINAL	MOMENT	MOMENT RESISTANCE*		SUPPORT REACTION RESISTANCE*	
	THICKNESS (INCH)	THICKNESS (INCH)	OF INERTIA (IN-4)	MID-SPAN (IN-LB)	SUPPORT (IN-LB)	END (LB)	INTERIOR (LB)
ĺ	.018	.016	.0362	656	553	137	242
	.021	.018	.0447	699	816	174	306
	.026	.024	.0472	838	720	209	411

*INCLUDES AN IMPORTANCE FACTOR OF 1.0, LIVE LOAD FACTOR OF 1.5, AND BASED ON A BEARING LENGTH OF 1.5"

MAXIMUM UNIFORMLY DISTRIBUTED LOADS (POUNDS/SQUARE FOOT)

SPAN CONDITION	SPAN (INCHES)	28 GAUGE (.018")		26 GAUGE (.021")		24 GAUGE (.026")	
		в	D	в	D	в	D
SINGLE	18	150	625	232	869	248	916
	24	98	264	136	366	140	386
	30	63	135	87	188	89	198
DOUBLE	18	101	1500	163	2085	213	2198
	24	76	633	117	879	120	927
	30	52	324	75	450	77	475
TRIPLE	18	114	1181	184	1642	247	1731
	24	85	498	138	693	150	730
	30	65	255	93	355	96	374

B = LOAD CAPACITY BASED ON STRENGTH MINIMUM YIELD STRESS Fy = 33,000 P.S.I. **D** = DEFLECTION BASED ON L/240

MAXIMUM WORKING STRESS FB = 20,625 P.S.I. YOUNG'S MODULUS (E) = 29,500,000 P.S.I.

AVAILABLE MATERIALS / 10,000 SERIES, KYNAR 500®

(.021")* 26 GA. (.026")** 24 GA.	(.018")** 28 GA.	THICKNESS & GAUGE
•	•	MIDNICHT BLACK ID 193
•	•	BRONZE ID 8981
•	•	CHOCOLATE BROWN ID 196
•	•	MARITIME GREY ID 690
•	•	GREY BERRY ID 3659
•		NAVY BLUE ID 198
•	•	TWILICHT BLUE ID 3644
	•	HARTFORD GREEN ID 8980
•	•	WINTER GREEN ID 3651
•		PATINA GREEN ID 201
	•	CORDOVAN ID 3643
	•	CRANBERRY RED ID 7437
•		CLASSIC COPPER ID 9919
•		BRIGHT SILVER ID 10637
•		GALVALUME PLUS

*16" WIDE ONLY **20 1/4" WIDE ONLY

PRE-PAINTED GALVALUME AZ150 STEEL ASTM A792 SS, GRADE 33, 10,000 SERIES, KYNAR 500®. GAUGES: 28 (.018" THICK), 26 (.021" THICK) AND 24 (.026" THICK).

MILL FINISH GALVALUME PLUS ASTM-A792 SS, GRADE 33, AZ180 GAUGES: 26 (.021" THICK) AND 24 (.026" THICK).





AVAILABLE COLOURS

10,000 Series, Kynar 500®

Midnight Black	Bronze
ID 193	ID 8981
Chocolate Brown	Maritime Grey
ID 196	ID 690
Grey Berry	Navy Blue
ID 3659	ID 198
Twilight Blue	Hartford Green
ID 3644	ID 8980
Winter Green	Patina Green
ID 3651	ID 201
Cordovan	Cranberry Red
ID 3643	ID 7437



HIDDEN FASTENER STEEL ROOF PANEL



ENVIRONMENT-FRIENDLY. THIS PRODUCT IS ENTIRELY RECYCLABLE.



ational Code Council aluation Services

Es

ICC





Dideal roofing

Head Office 1418 Michael Street Ottawa, ON K1B 3R2 Tel.: 613-746-3206 **Toll Free: 1-800-267-0860** Fax: 613-746-0445 info@idealroofing.ca

Toronto Manufacturing Facility 223 Corporation Drive Brampton, ON L6S 6G5 Tel.: 905-792-4354 **Toll Free: 1-877-792-4354** Fax: 905-792-7740

Moncton Manufacturing Facility 650 Frenette Avenue Moncton, NB E1H 2S7 Tel.: 506-857-3888 Toll Free: 1-833-753-0051 Fax: 506-857-8823


Quebec Regional Office 5240 Wilfrid-Hamel Boulevard Québec, QC G2E 2G9 Tel.: 418-874-0010 **Toll Free: 1-888-313-0010** Fax: 418-874-0011

www.idealroofing.com

Printed in the USA / September 2023

FLASHINGS AND TRIMS

Optional flashings and details are available in the Installation Guide.

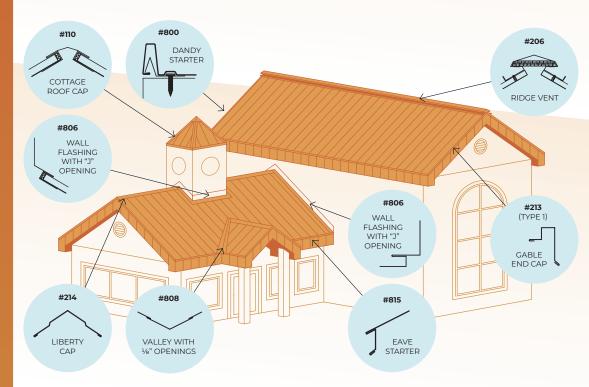

#110	COTTAGE ROOF CAP (24" GIRTH)	#206	RIDGE VENT	#213 TYPE 1	GABLE END CAP (A + B + 5¾" = GIRTH)
	22122 m 22122 m 3236 m 2122				1" 3%" 5%" B 5%" 5%" 5%"
#214	LIBERTY CAP (15" GIRTH)	#806	WALL FLASHING WITH "J" OPENING (18" GIRTH)	#808	VALLEY WITH ⅔" OPENINGS
135°~	3 ¹ /2" 135° ¹ /2" 1/2" 3"	[*] 9	ули страна и страна и Количина и страна и стр	PRE-P/	CALVALUME, 30" FLASHING AINTED 10,000 SERIES, 28" FLASHING
#815	EAVE STARTER (9" GIRTH)	С	FOAM AND METAL CLOSURES FOR RIDGE		END PLUG
₹ 3/4 1/2			20¼″ 		